



**Permaroof**UK<sup>®</sup>  
*The Permanent Roof People* Limited

**Permaroof500 Liquid EPDM  
Rubber: Creating an  
Anti-slip Surface**

**[www.permarroof.co.uk](http://www.permarroof.co.uk)**

## Permaroof500 Liquid EPDM Rubber: Creating an Anti-slip Surface



Anti-slip finishes can be applied directly onto the Top Coat UV layer while it is still wet. Please refer to the application guide for Permaroof500 liquid waterproofing top coat UV layer.

The EPDM liquid waterproofing system is applied layer by layer. Before the Top Coat UV or anti-slip coating is applied, the detailed work and the main surface layers must be actioned.


**For a full installation guide for the entire Permaroof500 liquid EPDM membrane, please visit:**

<http://www.diy-flat-roof.com/flat-rubber-roofing-installation-guides/liquid-waterproofing-systems/>



Depending upon the design level required, silica sand, mineral clippings or other suitable anti-slip finishes can be added.

Make sure you add the anti-slip medium to the edges of the area.

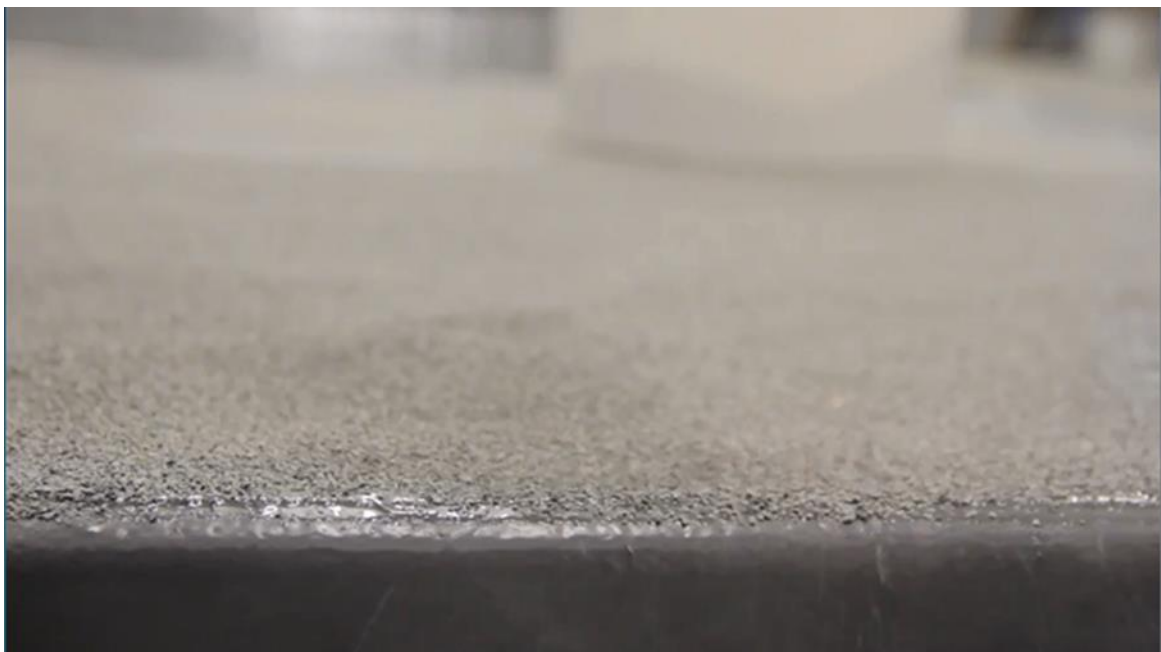

Allow the top coat to dry before sweeping off loose chippings. Masking tape must be removed immediately after the anti-skid has been applied.



For a finer, encapsulated anti-skid, you can add PermaPlastic to the mixed Top Coat UV at a 10–50% ratio before application.





Mix thoroughly at medium speed and ensure the product is well-blended. This plastic bead does not sink to the bottom of the mixed tin or container.



When applying the Permaroof500 Top Coat UV combined with PermaPlastic with a roller, it leaves a finer anti-skid encapsulated in the surface area.





This is ideal for balcony areas or swimming pool patios where people will be walking barefoot.



Allow to fully dry and cure before walking on the surface.

For commercial or heavy use, such as in a car park, public park area or in areas with steps, the creation of anti-skid and anti-slip surfaces is simplified with the use of Permaroof500 Liquid EPDM rubber.

The professional teams at Permaroof are available to offer advice and recommend the best anti-skid mediums for individual commercial projects. Contact the teams on **01773 608 839** or email us at **[sales@permaroof.co.uk](mailto:sales@permaroof.co.uk)**.

**For more guides, videos and  
downloads please visit:  
[www.diy-flat-roof.com](http://www.diy-flat-roof.com)**