



PermaroofUK[®]
The Permanent Roof People Limited

**Permaroof500 Liquid EPDM
Rubber: Main Area Application**

www.permarroof.co.uk

Permaroof500 Liquid EPDM Rubber: Main Area Application

What's in this installation guide?

In this tutorial we're going to show you how to tackle the main area application of Permaroof500 Liquid EPDM waterproofing system. Note that detailed application should be carried out first to ensure a successful project.



Please refer to our [other installation guides](#) for information about detailed application, top coat and the creation of anti-skid surfaces.

Let's go...



Accelerated Permaroof500 can be applied to the main surface in one or more layers using a 9-inch, solvent-resistant roller. Each layer must be fully cured before applying the next.



Work in sections as shown when applying the matting to the surface area. As before, dry roll the product through.



And add another layer of the Permaroof500 liquid EPDM to embed the matting.





And add another layer of the Permaroof500 liquid EPDM to embed the matting.



Make sure the Permaroof500 liquid EPDM is worked right to the edges of the area.



As it is naturally self-levelling, the Permaroof500 liquid EPDM does not need to be over-worked.



This provides more control over the thickness, which needs to be a minimum of 1.4mm thick, or a coverage rate of 2kg per square metre.






Accelerated Permaroof500 will be touch-dry in approximately 40-50 minutes and ready for topcoat in a couple of hours.

The Permaroof500 liquid roof system can be complemented with our unique Permaroof trim system, giving your roof a professional, neat-looking finish.





Full details on how the trim is installed is covered in our training course.

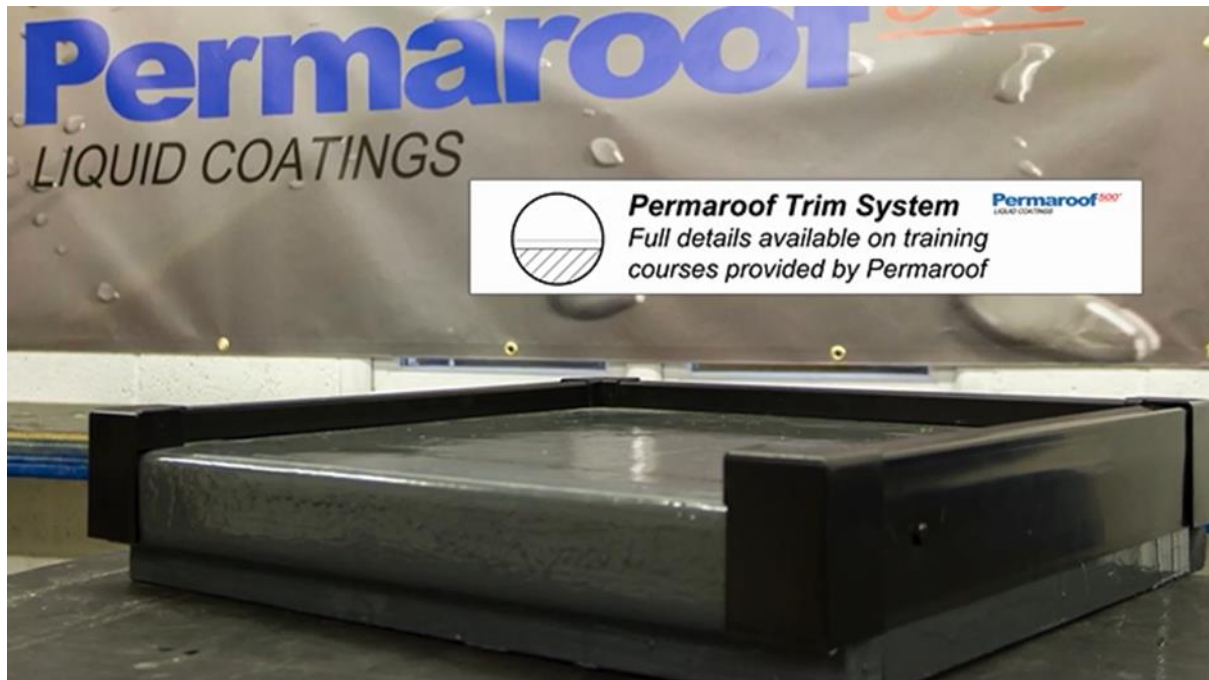

Find out more about Permaroof Liquid training at:

<http://www.diy-flat-roof.com/flat-rubber-roofing-installation-guides/training/>

For more guides, videos and downloads please visit:

www.diy-flat-roof.com